


Model EYE-ON DVR		AHD (2.0 / 1080P)			
		AHD Prestige04	AHD Prestige08	AHD Prestige16	
		Mini case		Mini Wide case	
Video	Camera input	4 BNC	8 BNC	16 BNC	
	Individual HD/Analog selectable	AHD (2.0 / 1080P) + 960H Hybrid			
	Available source	AHD 720p25,30/1080p25,30 /Composite/960H/Mixed			
	Output	1 HDMI (Main Display) 1 VGA (Main Display)			
Audio	Audio input	4 RCA	8 RCA	16 ( 8 RCA + 8 DB15)	
	Output	1 RCA			
Sensor In		16 (NC, NO selectable)			
Alarm out		1 relay			
Operating System		Embedded Linux OS			
Display	Speed	Real Time			
	Resolution (Pixel)	1280X1024, 1280X720, 1920X1080			
	Split screen	1,4	1,4,6,8,9	1,4,6,8,9,13,16	
Main Recording	CODEC	H.264			
	Resolution (Pixel)	1080p (1080p25,30) 720p (720p25,30) 960H, D1 (Composite, 960H)			
	Picture quality	4 steps (Super, High, Medium, Low)			
	Speed	NTSC area PAL area	120fps@720p/60fps@1080p 100fps@720p/50fps@1080p	240fps@720p/120fps@1080p 200fps@720p/100fps@1080p	480fps@720p/240fps@1080p 400fps@720p/200fps@1080p
Dual Recording	CODEC	H.264			
	Condition	Main Recording is 1080p, 720p			
	Resolution (Pixel)	None	480x256	480x256	
Playback	Display	1,4	1,4,6,8,9	1,4,6,8,9,13,16	
	Search mode	Calendar, Event ,POS , Panorama, Thumbnail			
	Speed	NTSC area PAL area	30fps@1080p 25fps@1080p	30fps@1080p 25fps@1080p	60fps@1080p 50fps@1080p
	Fast/Slow speed	Normal, REW & FF [recorded speed x2, x4, x8, x16,x32,x64,x1/2,x1/4], Frame to frame, Pause			
Network (Individual setting of resolution, frame rates and picture quality)	Network Interface	Megabit Ethernet		Gigabit Ethernet	
	High Resolution (Pixel)	Record Steaming			
	Low Resolution (Pixel)	480x256 (1080p25,30) 480x256 (720p25,30) CIF (Composite, 960H)			
	Speed	NTSC area PAL area	50fps (480x256)	240fps (480x256)	240fps (480x256)
	Protocol	TCP/IP, HTTP, DHCP			
	Application	Windows 7 / 8 (PC Client system& IE)/MAC			
	Web Browser	Internet Explorer, Safari, Chrome, Firefox			
	Smart phone App	Android, iPhone for live and search			

Backup	Interface	USB 2.0 X 2	
	Backup device	External HDD, CD&DVD-RW, Network, Thumb Drive	
The number of HDD		1 SATA(No capacity limit ; 6TB of more)	2 SATA(No capacity limit ; 6TB of more)
Function		•Full GUI with alpha blending	
		•Individual setting of resolution, frame rates and picture quality	
		•Instant Replay	
		•Digital Zoom	
		•Mouse Control	
		•Weekly scheduler with holiday by 10 minutes setting	
		•Covert, Disable and Private function of cameras	
		•Motion Detection with 576 area setting	
		•Relay alarm output	
		•PTZ control by RS-485	
		•Daylight Saving Time and Network Time Setting	
		•Multi User Authority up to 8 Users	
		•Deinterlacer upon live and playback	
		•22 languages with full graphic	
		•Individual Network port setting	
		•Auto Deletion	
		•Import and Export the configuration	
•Interactive setup via network			
•POS Interface			
•Dual CODEC engine for independent video transmission			
		•Mirroring	
Others	Power Consumption	24W	60W
	Operating Temperature	5 ~40°C(41~104F)	
	Relative Humidity	Maximum 80% non-condensing	
	Dimension	300(W)×210(D)×48(H) mm	380(W)×340(D)×50(H) mm

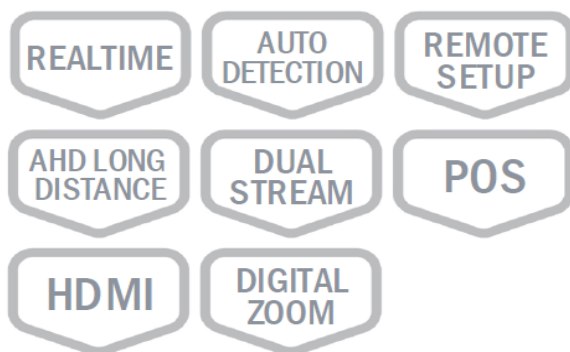

## Features

- 1080P Full HD Realtime Live
- 1080P Half Realtime Recording
- Auto detection AHD & 960H
- Long distance up to 300m (AHD)
- Individual channel setting
- User friendly OSD GUI
- Powerful CMS with Remote setup
- EYEON Mobile APP (For iPhone, Android)
- Storage – 1 SATA (Mini : 04/08ch), 2 SATA (Mini Wide: 16ch)

\* Mini Wide Type for 16ch.



## Dimensions (Unit:mm)

